

Solar Cell Modelling and Basic DC-DC Converters Using Neural Network

Abdul Basit Khan¹, Dr. Imran Khan², Mr. Anwar Ahmad³, Mohd. Faiz Khan⁴.

¹Electrical Engineering, A.I.E.T., Dr. A.PJ Abdul Kalam Technical University, Lucknow, 226002

² Head Department of Electrical Engineering, A.I.E.T. Lucknow, 226002

³Assistant Professor of Electrical Engineering, A.I.E.T. Lucknow, 226002

⁴ Department of Mechanical Engineering, A.I.E.T. Lucknow, 226002

Abstract- This article speaks to a diagram of the Maximum force qualities of Via MPPT with Neural Network The Neural system, the Perturb and, Observe (P&O) and Neural + PID are the most known and used procedures. Other adjusted schedules, for instance, the steady Conductance (INC) technique, the Neural Network framework (NN) methodology, and fleecy reason controller strategy have been in like manner offered an explanation to upgrade the execution of these strategies. The enhancements of neural network MPPT by learning the neural MPPT by taking observations of P&O and further addition of PID controllers can reduce the response time along with harmonic distortion.

Thus the network is very effective, however, if the fuzzy logic controller can replace the PID controller then neural with fuzzy logic can further improve these two distinct parameters further.

© 2012 Published by Elsevier Ltd. Selection and/or peer-review under responsibility of Global Science and Technology Forum Pte Ltd

Keywords: MPPT with AI, Reduce losses, Maximum Power Tracking.

1. MAIN TEXT

The generation of Electrical Energy Worldwide based on very limited finite non-renewable Capital (petroleum, Water, Nuclear). Issues of globalization and environmental pollution due to energy have become a big concern. As a result. It can be decreased by the utilization of photovoltaic (PV) array. Photovoltaic has the capacity to Produce electricity quiet reliable. Thus, the photovoltaic process is convert electricity from sunlight. PV cells transform sunlight directly into electricity without generating any Unwanted material. The Neural network, the Perturb and, Observe (P&O) and Neural + PID are the most known and utilized strategies. Other altered routines, for example, the (INC) method, the Neural Network system (NN) strategy, and fluffy rationale controller procedure have been likewise answered to enhance the execution of these methods. The

extra control circle brings about an increment in the P&O proficiency. As they Framework shows a speedier dynamic execution. The P&O strategy is usually utilized in light of its Straight forwardness and simplicity of execution. Moreover, P&O (with a little step size) in ostensible conditions can have MPPT efficiencies, for the most part, the same as other complex procedures, and still less demanding execution. However, the drawback of this technique is that the operating point of the PV array oscillates around the MPP. Therefore, the power loss may increase. Furthermore, when the solar radiation changes rapidly, the P&O method probably fails to weigh the MPP. Some disadvantage is that the MPPT may not be to locate the MPP as the number of sunlight decreases because the PV curve flattens out. In this dissertation performance of P&O method, Neural Network and Neural + PID method has been done and shown very precisely.

1.1 Structure

In the conversion of sunlight into electricity by a photovoltaic cell (PV cell), the physical process involved is Photovoltaic effect. The device that converts solar radiation into electricity is called a photovoltaic cell. The light is absorbed and the electrons in the atoms of the PV cell and get energy from the absorbed light. And hence after absorbing energy these electrons start their position and becomes a part of the current in the circuit.

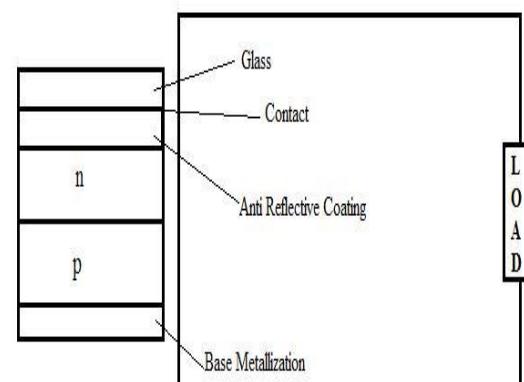


Figure 1.1(a) Structures of Photovoltaic Cells

1.2. Construction

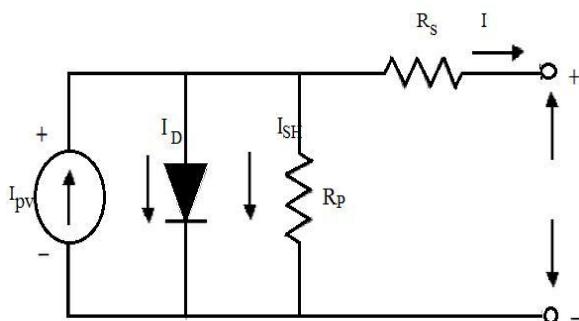


Figure 1.2 Single Diode Mathematic Model of PV Cell

Where,

I = the photovoltaic output current

V = the photovoltaic output voltage.

T = the thermal voltage of array with N_s cells connected in series

Q = The electron charge ($1.60217646e-19C$)

K = Bolts man Constant

T = the Temperature of P-n Junction

α = the Diode Idealistic Constant

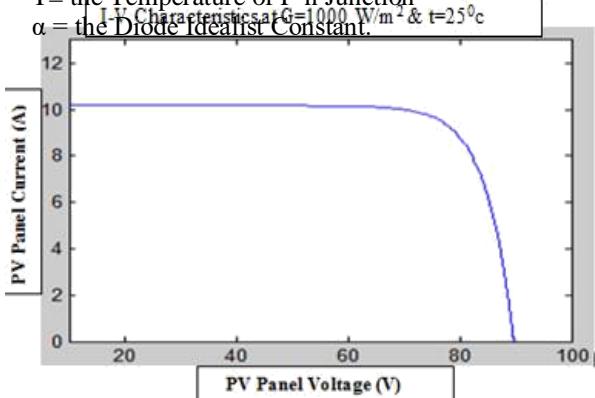


Figure 1.3 P-V Characteristics of Photo Voltaic Panel

MPPT

It is a power electronic system which tracks the Maximum on the characteristic curve of the PV module. In this system

of power electronics, the maximum power point is tracked on the characteristic curve of Cell module, line, the solar insulation is varying overall. A fundamental component of MPPT is an efficient DC-to-DC. converter. Whose control is done by power electronics switch operated by an algorithm?

Power based methods which utilize iterative algorithms to track continuously the MPP

Through the current and voltage measurement of the PV module. In this category, one of the most successful and used methods is perturbation and observation (P&O).

A dynamic following strategy is important to separate the greatest power from the PV cells [14]. Numerous looks into has been created concerning the various calculations for the most extreme power point following (MPPT) thinking about the varieties of the framework parameters and additionally climate changes [13],[17], for example, bother and watch technique, open and short out strategy, neural system and neural system with PID, gradual conductance calculation, fluffy rationale. The square graph in Figure 3.1 presents a PV framework with MPPT [12]. The heap can be bolstered from a PV board utilizing a MPPT circuit with a particular controller to follow the pinnacle power produced by the PV board. Other assurance gadgets can be included. The control circuit takes voltage and current criticism and produces the obligation cycle D of the Boost converter.

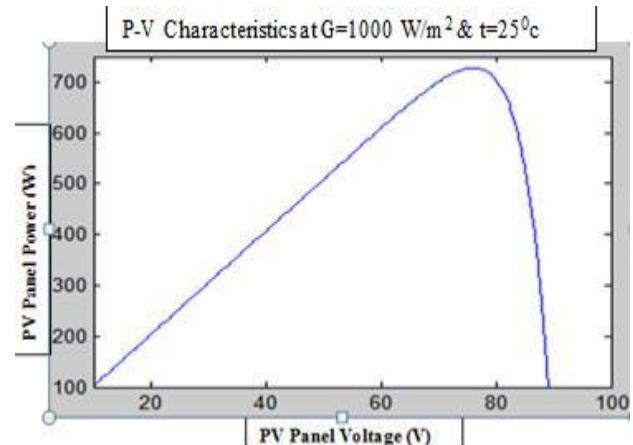


Figure 1.4 I-V Characteristics of Photo Voltaic Panel

2.1 P&O controller method

It is less complex MPPT control. Perturb & Observe (P&O) is on the array output power and on the change (add or subtracting) of the power respect to change in array voltage or current. The simplest one used to maintain the PV array voltage. Its implementation cost is less. The (P&O) method define that defines that when the operating voltage, of the PV panel is perturbed by a small addition and the resulting change in power P is positive, then it means that the

direction of MPP is followed and the system continues to perturbation in the same direction.

3.1 Neural Network based MPPT

A system of program and data structure that approximate the operation of the human brain is known as Neural Network. A large number of parallel operating processes are involved in the neural network. A Neural Network is trained firstly, i.e. a large amount of data and rules are fed. A program is used to let the network know how to behave in response to an internal stimulus or how to initiate an activity on its own.

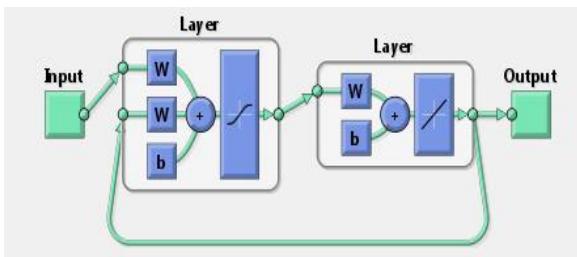


Figure 3.1 Architecture of Neural Network using MATLAB

Natural sensory systems are used to enliven these components. A neural system can be trained to perform a specific capacity by conforming the qualities of the weights between components. For nonlinear dynamic systems, artificial neural networks are proved to be universal approximations. A multilevel Neural Network is to emulate nonlinear systems [32]. Neural Network is used to provide an improved method of deriving nonlinear models which is complementary to the conventional technologies.

3.2 Neural Network with PID Based MPPT

A. PID Controller

The majority of control loops in the different industry consist of Proportional-Integral-Derivative (PID) controllers. The output process can be regulated easily with the help of a PID controller. In the process control industry, the optimal operation of Proportional-Integral-Derivative (PID) controller is needed. These optimal operations are economical. Recently the robust control is very important in control engineering. In this dissertation, the design method of obtaining the Proportional-Integral-Derivative (PID) controller is robust and stabilized in the process of time delay. This design method is dependent on the frequency response of the system. Therefore this method reduces the complexity present in plant modeling. Our controller design method is very important for the process control because time delay is parametric uncertainties are present in the real-time process. In this design method DC model with a communication delay and single area not reheat stream generation unit is used. The result obtained is satisfactory.

For the perturb plants the robust stability is achieved. The integral controller reduces steady-state error and proportionally reduces overshoot and derivative controller reduces rise time.

The first section of the simulated model is a PV array, in which temperature and solar irradiance are absorbed to generate electricity. The output of the PV array depends on two things: Temperature and Irradiance. Therefore current is generated at an output voltage of PV array. The current is needed two MPPT and current controlled source (c.c.s.) both. This leads to the charging of capacitor (DC Bus) and the output of the DC bus is fed to DC-to-DC Boost converter. In DC-to-DC boost converter, MOSFET is used as a switch whose GATE signal is controlled and given through Neural Network based maximum power point tracking (MPPT). All the circuit is similar to the previous simulated model only P&O based MPPT is replaced by Neural Network based MPPT.

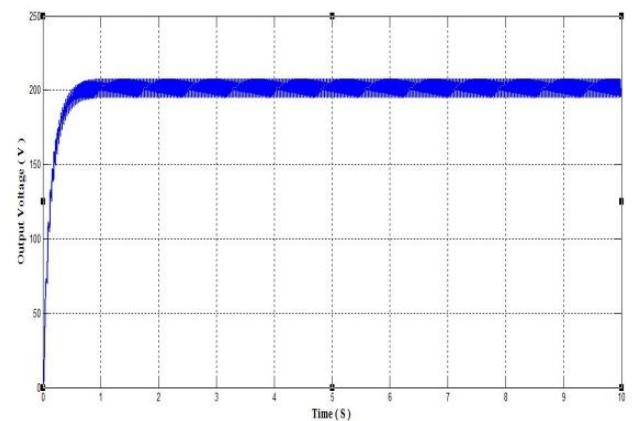


Figure 3.2 The Input Voltage Waveform of Neural Network Based MPPT Technique

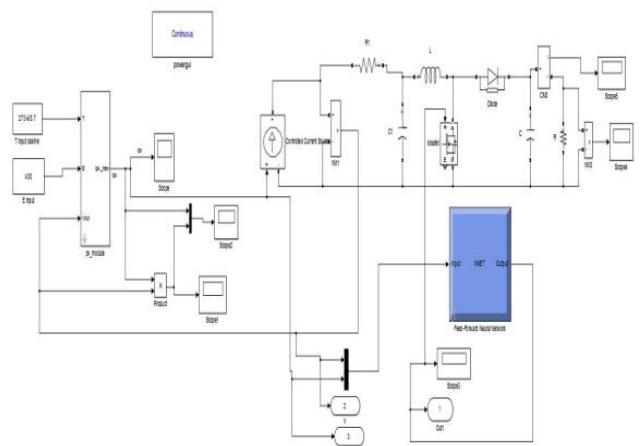


Figure 3.3 Simulation Model in Neural Network-Based-

MPPT Technique.

- The input voltage of the PV array obtained is 79 volt.
- The Output voltage obtained is after using Neural Network based MPPT is 200 volt.

Conclusions

This work has displayed the demonstrating of PV module and the advancement of the MPPT strategies. Specifically, the exhibitions of the controllers are dissected in these three conditions with consistent illumination and temperature. The proposed framework is recreated by utilizing MATLAB-SIMULINK. We have considered in our present research work the recreation of three strategies for control:

Perturb and Observe (P&O) and Neural Network based MPPT and Neural Network with PID based controller MPPT. They were connected on sunlight based photovoltaic Array to change over the voltage and current contribution to a fitting obligation cycle. We thought about the got reenactment results, by exposing the controlled framework to the equivalent ecological conditions.

The reenactments have demonstrated that the utilization of neural system controller can improve the productivity of the general framework by limiting the vitality misfortunes when the difference in illumination is visit instead of the traditional strategy, for example, irritate and watch procedure.

.